



HVLS Fan Reference Guide

TITAN

5 Blade, Direct Drive HVLS fan which couples the most efficient technology with widespread air movement and year round savings.




Item No.	Voltage	Blade		Hanging Weight	RPM	Industry	
		Diameter	Horsepower			Spacing	CFM
81011517	208-240V or 480V	14	.75 HP	168 lbs.	105	70 ft.	122,215
81011518	208-240V or 480V	16	1 HP	175 lbs.	102	80 ft.	183,096
81011519	208-240V or 480V	18	1 HP	183 lbs.	95	90 ft.	205,449
81011520	208-240V or 480V	20	1 HP	190 lbs.	82	100 ft.	229,695
81011521	208-240V or 480V	24	1 HP	204 lbs.	70	120 ft.	316,000

Available in: 208-240V +/- 5% Single Phase and Three Phase, 480V. Includes: Fan, I-Beam Mounting Hardware, Variable Speed Digital Touch-Screen Controller, 100 ft. CAT5e Cable

ECO

4 Blade, Direct Drive Black Matte HVLS fan. Easy install with lightweight components. Works well in both small and large spaces.

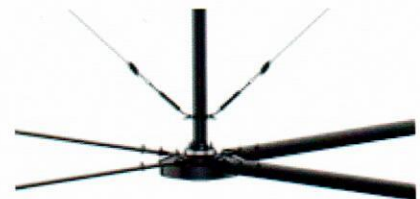

** Available with Rigid Mount for sizes 8-14 w/ no guy wires

Item No.	Voltage	Blade		Hanging Weight	RPM	Industry	
		Diameter	Horsepower			Spacing	CFM
81011522	208-240V or 480V	8	.625 HP	87 lbs.	190	32 ft.	46,175
81011523	208-240V or 480V	10	.625 HP	97 lbs.	140	40 ft.	74,952
81011524	208-240V or 480V	12	.625 HP	101 lbs.	110	48 ft.	91,043
81011525	208-240V or 480V	14	.625 HP	128 lbs.	100	56 ft.	121,923
81011526	208-240V or 480V	16	.625 HP	135 lbs.	90	64 ft.	154,024
81011527	208-240V or 480V	18	.625 HP	138 lbs.	80	72 ft.	180,624
81011528	208-240V or 480V	20	.625 HP	145 lbs.	70	80 ft.	216,255
81011529	208-240V or 480V	24	.625 HP	159 lbs.	60	96 ft.	289,088

Available in: 208-240V +/- 5% Single Phase and Three Phase, 480V. Includes: Fan, I-Beam Mounting Hardware, Variable Speed Digital Touch-Screen Controller, 100 ft. CAT5e Cable

XP

4 Blade, Direct Drive Black Matte HVLS fan ideal for smaller spaces with lower ceilings.



Item No.	Voltage	Blade		Hanging Weight	RPM	Industry	
		Diameter	Horsepower			Spacing	CFM
81011534	110V	7	.625 HP	100	200	32 ft.	42,074
81011535	110V	8	.625 HP	104	156	32 ft.	45,787
81011536	110V	10	.625 HP	108	139	40 ft.	74,774
81011537	110V	12	.625 HP	117	108	48 ft.	91,901
81011538	110V	14	.625 HP	121	108	56 ft.	121,923

Available in: 110V. Includes: Fan, [redacted] Commercial Hardware, Variable Speed Digital Touch-Screen Controller, 100 ft. CAT5e Cable, [redacted]

Trak

4 Blade Direct Drive perfect for indoor out door spaces such as restaurants, meeting areas, patios, fitness centers, and sunrooms.

2 Position mounting system allows for standard or angled mounting available.

Available in Black, White or Silver



Item No.	Voltage	Blade Diameter	Lighting Available	Hanging Weight	AMP Draw
81011539	120V	5 ft. / 60 inches	w/Light	48 lbs.	0.52
81011540	120V	6 ft. / 72 inches	w/Light	48 lbs.	0.68
81011541	120V	7 ft. / 84 inches	w/Light	49 lbs.	0.65
81011542	120V	8 ft. / 96 inches	w/Light	49 lbs.	0.68
81011543	240V	5 ft. / 60 inches	w/Light	48 lbs.	0.52
81011544	240V	6 ft. / 72 inches	w/Light	48 lbs.	0.68
81011545	240V	7 ft. / 84 inches	w/Light	49 lbs.	0.65
81011546	240V	8 ft. / 96 inches	w/Light	49 lbs.	0.68
81011547	120V	5 ft. / 60 inches	No Light	48 lbs.	0.52
81011548	120V	6 ft. / 72 inches	No Light	48 lbs.	0.68
81011549	120V	7 ft. / 84 inches	No Light	49 lbs.	0.65
81011550	120V	8 ft. / 96 inches	No Light	49 lbs.	0.68
81011551	240V	5 ft. / 60 inches	No Light	48 lbs.	0.52
81011552	240V	6 ft. / 72 inches	No Light	48 lbs.	0.68
81011553	240V	7 ft. / 84 inches	No Light	49 lbs.	0.65
81011554	240V	8 ft. / 96 inches	No Light	49 lbs.	0.68

Available in: 120V or 240V. Includes: Fan, 11 Inch Downrod, Handheld Remote Control